




[www.Siliconmethod.com](http://www.Siliconmethod.com)

## Removal instructions for Toyota Tacoma overhead displays:

1. Remove the screw inside the sunglasses compartment. (1 Philips head screw)
- 2.) Disengage the 2 clips and 3 plastic claws. Oddly, the locking claws are on the screw end of the console, so you must to gently pull down on the **end closest to the windshield** where the two clips are. Be careful, it can 'pop' out suddenly. Go slow and make sure you don't yank out the wiring. We aren't responsible for damage to your truck or to you!
- 3.) Disconnect the accessory meter connector and map lamp connector. **Optionally**, you can then removed the 3 T10 size torx screws that hold the display screen (accessory meter) in, and remove it from the console so you will have a (much) smaller part to ship.

2006 Toyota Tacoma PreRunner

**Fig. 171: Disconnecting Accessory Meter Connector**  
Courtesy of TOYOTA MOTOR SALES, U.S.A., INC.

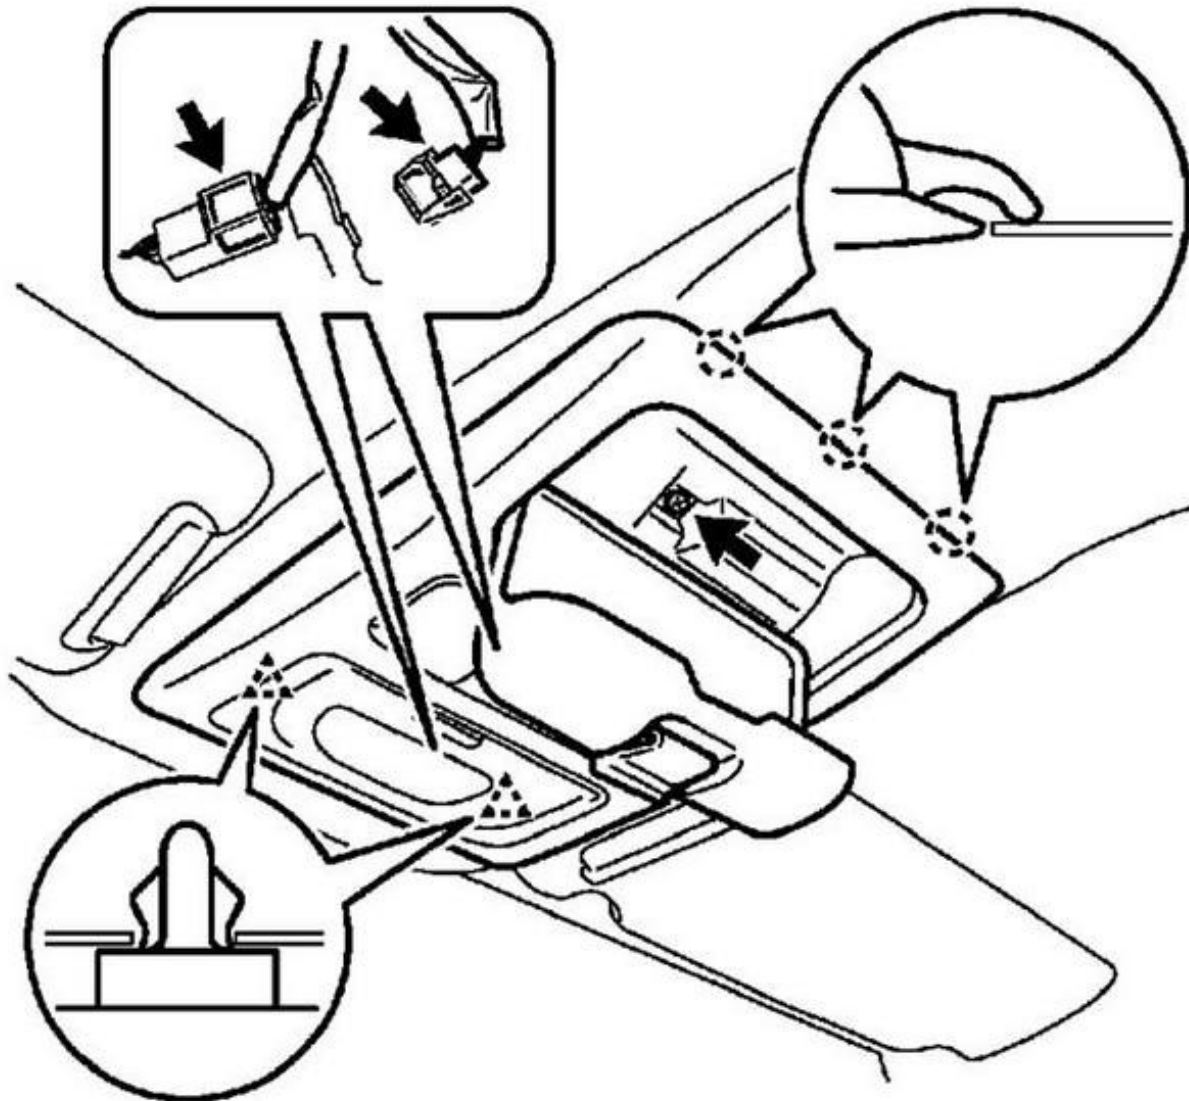

**Shipping instructions:**

Be sure to include contact information with email, payment receipt or a business card in the box. Sometimes the return address label isn't legible, and we need a way to figure out who sent the repair.

Please make checks out to HJ Services.

HJ Services  
PO Box 774  
Festus, MO 63028